

Development setup

Pieter P

Prepare for cross-compilation

Install developer tools

```
$ sudo apt install ubuntu-dev-tools
```

We're only using these tools to easily manage chroot environments and to run `apt` to manage cross-compilation dependencies. If you're interested, you can find more information on the Ubuntu and Debian Wiki, but most of it is far beyond the scope of this guide: <https://wiki.ubuntu.com/SimpleSbuild>, <https://wiki.debian.org/sbuild>.

Create a Raspberry Pi OS root filesystem

We'll use `debootstrap` to create a minimal Raspberry Pi OS root filesystem in a folder on our computer. It has all the system libraries of the Raspberry Pi installed and you can install third-party libraries as well, these are necessary to link your executables when cross-compiling.

This root filesystem folder is often referred to as the `sysroot`, and it will later be passed as an option to CMake, the compiler, the linker, GDB, etc. so they can find the necessary files (we cannot use the actual root file system of our computer, because the libraries there have the wrong architecture, most likely `x86_64`, but we need `armv6` libraries).

```
$ wget -qO- https://archive.raspbian.org/raspbian/public.key | gpg --import -
$ mk-sbuild --arch=armhf buster --debootstrap-mirror=http://raspbian.raspberrypi.org/raspbian --name=rpizero-buster --
  debootstrap-keyring "$HOME/.gnupg/pubring.kbx" --merged-usr" --skip-proposed --skip-updates --skip-security
```

If this is the first time you use `mk-sbuild`, you'll be asked to edit your `~/sbuildrc` file. Since we're not actually going to be publishing any packages, you can just accept the defaults. After this first run, reboot your computer (or log out and back in again, or use `su - $USER`, to flush group memberships), and run the second command again:

```
$ mk-sbuild --arch=armhf buster --debootstrap-mirror=http://raspbian.raspberrypi.org/raspbian --name=rpizero-buster --
  debootstrap-keyring "$HOME/.gnupg/pubring.kbx" --merged-usr" --skip-proposed --skip-updates --skip-security
```

This will install a minimal version of Raspberry Pi OS in a folder on your computer. The Ubuntu development tools allow you to install libraries into this folder using `apt install`, which makes it very easy to manage the cross-compilation dependencies.

The `--merged-usr` option is included in the `--debootstrap-keyring` option so that it is passed on to `debootstrap`, the `mk-sbuild` script currently lacks this option.

If something went wrong or if you no longer need it, you can use `sudo sbuild-destroychroot rpizero-buster-armhf`, it will give instructions how to remove the root filesystem and the schroot configuration.

If you used a different name for your build environment, remember to replace it in the commands throughout the rest of the tutorial.

Install the toolchain

The cross-compilation toolchains in the Ubuntu repositories are not compatible with Raspberry Pi OS, so you'll have to build or install your own. It's easiest to just download the crosstool-NG toolchain from <https://github.com/ttapa/docker-arm-cross-toolchain>.

In this example, I'll be using the ARMv6 toolchain, because it is compatible with all Raspberry Pi boards. If you only need to support newer boards, or if you're using a 64-bit version of Raspberry Pi OS, you might want to use the ARMv8 or AArch64 toolchain (see the README of [ttapa/docker-arm-cross-toolchain](https://github.com/ttapa/docker-arm-cross-toolchain) for more details).

```
$ mkdir -p ~/opt
$ wget -qO- https://github.com/ttapa/docker-arm-cross-toolchain/releases/latest/download/x-tools-armv6-rpi-linux-
  gnuabihf.tar.xz | tar xJ -C ~/opt
```

This installs the toolchain to `~/opt/x-tools/armv6-rpi-linux-gnuabihf`. You can add it to your path using:

```
$ echo 'export PATH="$HOME/opt/x-tools/armv6-rpi-linux-gnuabihf/bin:$PATH"' >> ~/.profile
```

This will only take effect after you log out and back in again, so you might want to do that now, or execute the following command to add it to your path in the current terminal:

```
$ export PATH="$HOME/opt/x-tools/armv6-rpi-linux-gnueabihf/bin:$PATH"
```

Verify that the toolchain is installed correctly by running:

```
$ armv6-rpi-linux-gnueabihf-g++ --version
armv6-rpi-linux-gnueabihf-g++ (crosstool-NG UNKNOWN) 11.2.0
Copyright (C) 2021 Free Software Foundation, Inc.
This is free software; see the source for copying conditions. There is NO
warranty; not even for MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
```

You can find more information about this toolchain and instructions on how to customize it [here](#).

Install the C++ standard library to the Pi

Out of the box, Raspberry Pi OS uses an older compiler and has an older version of the C++ standard library installed. Since we're going to use a new toolchain, we need to install a newer version of `libstdc++` to the Pi to be able to run our programs:

```
$ scp ~/opt/x-tools/armv6-rpi-linux-gnueabihf/armv6-rpi-linux-gnueabihf/sysroot/lib/libstdc++.so.6.0.29 RPi0:~
$ ssh RPi0 bash << 'EOF'
  sudo mkdir -p /usr/local/lib/arm-linux-gnueabihf
  sudo mv libstdc++.so.6.0.29 $_
  sudo ldconfig
EOF
```

The library is installed in `/usr/local/lib` so it doesn't interfere with the libraries managed by the system in `/usr/lib`.

Also do the same for the root filesystem on your computer, this comes in handy when debugging later:

```
$ sudo mkdir -p /var/lib/schroot/chroots/rpizero-buster-armhf/usr/local/lib/arm-linux-gnueabihf
$ sudo cp ~/opt/x-tools/armv6-rpi-linux-gnueabihf/armv6-rpi-linux-gnueabihf/sysroot/lib/libstdc++.so.6.0.29 $_
$ sudo schroot -c source:rpizero-buster-armhf -u root -d / ldconfig
```

Install and configure the IDE

Install Visual Studio Code

You can download and install VSCode from <https://code.visualstudio.com/Download>.

Install the extensions

You'll need the following extensions:

- “clangd” by LLVM Extensions
- “CMake Tools” by Microsoft

The screenshot shows the Visual Studio Code interface with the Extensions view on the left. The search bar contains 'clangd'. The extension list on the left includes 'clangd 0.1.12' by LLVM Extensions, 'ClangDiag 0.0.7' by Aayush Chawla, and others. The main panel displays the details for the 'clangd' extension. The extension is provided by 'LLVM Extensions' and has a rating of 5 stars. It is currently installed and enabled globally. The description states it provides C/C++ language IDE features for VS Code using clangd. The setup section mentions that the extension requires the clangd language server and provides instructions for installation and project setup.

clangd | llvm-vs-code-extensions.vscode-clangd

LLVM Extensions | 196,261 | 5 stars | Repository | License | v0.1.12

C and C++ completion, navigation, and insights

[Disable](#) [Uninstall](#) [Settings](#) This extension is enabled globally.

[Details](#) [Feature Contributions](#) [Changelog](#)

clangd

Provides C/C++ language IDE features for VS Code using [clangd](#):

- code completion
- compile errors and warnings
- go-to-definition and cross references
- include management
- code formatting
- simple refactorings

Setup

clangd server

The extension requires the clangd language server. You will be prompted to download it if it's not found on your PATH. (Automatic installation is possible on x86-64 Linux, Windows, and Mac).

If you have an old version of clangd installed on your system already, you can run "Check for clangd language server update" from the command palette.

Project setup

clangd is based on the clang C++ compiler, and understands even complex C++ code. However, you must tell clangd how your project is built (compile flags). A `compile_commands.json` file can usually be generated by your build system (e.g. by setting `-DCMAKE_EXPORT_COMPILE_COMMANDS=1` when building with CMake, or with [many other tools](#)).

The screenshot shows the Visual Studio Code interface with the Extensions view on the left. The search bar contains 'cmake tools'. The extension list on the left includes 'CMake Tools 1.7.3' by Microsoft, 'CMake 0.0.17' by twxs, 'R Tools 0.0.25' by Mikhail Arkhipov, 'React Native Tools 1.5.2' by Microsoft, 'XML Tools 2.5.1' by Josh Johnson, 'AZ AL Dev Tools/AL C... 3.0.11' by Andrzej Zwierzchowski, 'Spring Boot Tools 1.26.0' by Pivotal, 'Tools 0.1.2' by private tools, 'Cordova Tools 2.2.3' by Microsoft, 'Azure Resource Mana... 0.15.2' by Microsoft, 'Unity Tools 1.2.12' by Tobiah Zarlez, and 'Azure CLI Tools 0.5.0' by Microsoft. The main panel displays the details for the 'CMake Tools' extension. The extension is provided by 'Microsoft' and has a rating of 5 stars. It is currently installed and enabled globally. The description states it provides extended CMake support in Visual Studio Code. The setup section mentions that the extension requires the CMake Tools language server and provides instructions for installation and project setup.

CMake Tools | ms-vscode.cmake-tools

Microsoft | 2,385,410 | 5 stars | Repository | License | v1.7.3

Extended CMake support in Visual Studio Code

[Disable](#) [Uninstall](#) [Settings](#) This extension is enabled globally.

This extension is recommended based on the files you recently opened.

[Details](#) [Feature Contributions](#) [Changelog](#) [Extension Pack](#)

CMake Tools

CMake Tools provides the native developer a full-featured, convenient, and powerful workflow for CMake-based projects in Visual Studio Code.

Important doc links

- CMake Tools quick start
- Configure and build a project with CMake Presets
- Configure a project with kits and variants
- Build a project with kits and variants
- Debug a project
- Configure CMake Tools settings
- How to
- FAQ
- Read the online documentation
- Contribute

Issues? Questions? Feature requests?

PLEASE, if you experience any problems, have any questions, or have an idea for a new feature, create an issue on the [GitHub page](#)!



This extension itself *does not* provide language support for the CMake scripting language. For that we recommend [this extension](#).

Microsoft Open Source Code of Conduct

This project has adopted the [Microsoft Open Source Code of Conduct](#). For more information see the [Code of Conduct FAQ](#) or contact

Installing clangd

If this is the first time you're using the clangd extension, you'll have to install the language server. When you open a C++ file for the first time, the extension will automatically give you a prompt:

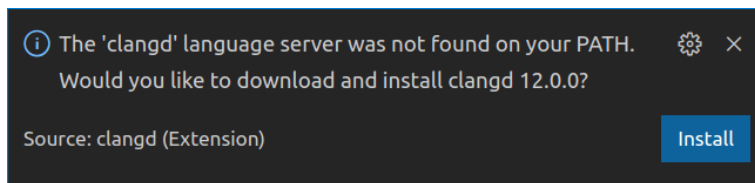

Once the language server is installed, you get all features you'd expect from an IDE, such as semantic syntax highlighting, go-to-definition, autocomplete, documentation, refactoring options, etc.

